BOHAI 12("BH12")



For Additional Information Please Contact: COSL DRILLING Marketing Department P. O. Box 232, Beijing 101149, China, P.R.C Phone: +86 010 84522511 Fax: +86 010 84522867 sh_cosldrillingmarket@cosl.com.cn www.cosl.com.cn


General Description


| Design/Generation Mitsubishi MD-T-45 J | |
|---|---|
| | |
| Constructing Shipyard | Mitsubishi Heavy Industries, LTD Hiroshima Shipyard & Engine Works |
| Year Enter Service/Significant Upgrades | 1978 |
| Classification | ABS |
| Flag | China |
| Displacement | 7,203tons |
| Variable Deck | 1,990tons |
| Operating Water Depth | 186ft |
| Maximum Drilling Depth | 20,000ft |
| Accommodation | 120 |
| Drilling Equipment | |
| Top Drive | Varco IDS-1, 1,000HP, 5,000psi |
| Draw works | National 1320-UE with 2 x 800HPDC |
| Derrick | CONTINENTAL EMSCO MITSUBISHI |
| Cantilever | 45ftx 11ft |
| Mud Pumps | Baoji F-1600 x 2, 1600HPeach, 5,000psi |
| Storage Capacities | |
| Fuel Oil | 2,012bbls |
| Liquid Mud | 1,937bbls |
| Base Oil | |
| Brine | |
| Drill Water | 2,742bbls |
| Portable Water | 2,264bbls |
| BOP & Subsea Equipment | |

These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.



| BOP Rams | Shaffer x 13-5/8" x2 x 10,000psiWP Single Ram , Shaffer x 13-5/8" x 10,000psiWP Dual Ram BOPs |
|--------------------|---|
| BOP Annular | Shaffer x 13-5/8" x 5,000psiWP Annular |
| Diverter | |
| Other Information | |
| Cranes | 40.6 ton x 2 |
| Heli-deck | Sikorski S61 N Helicopter |
| Containment System | zero discharge |



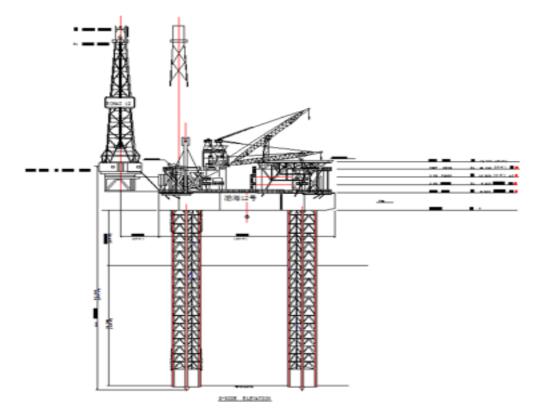

These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.



