


**HAIYANGSHIYOU 941 (“HYSY941”)**

	For Additional Information Please Contact: COSL DRILLING Marketing Department P. O. Box 232, Beijing 101149, China, P.R.C Phone: +86 010 84522511 Fax: +86 010 84522867 <a href="mailto:sh_cosldrillingmarket@cosl.com.cn">sh_cosldrillingmarket@cosl.com.cn</a> <a href="http://www.cosl.com.cn">www.cosl.com.cn</a>
<b>General Description</b>	
Design/Generation	Friede & Goldman,Ltd.™/JU2000E
Constructing Shipyard	Dalian Shipbuilding Industry Co,Ltd
Year Enter Service/Significant Upgrades	2006
Classification	ABS
Flag	CHINA
Displacement	22,619tons
Variable Deck	6,534tons
Operating Water Depth	400ft
Maximum Drilling Depth	30,000ft
Accommodation	145
<b>Drilling Equipment</b>	
Top Drive	NOV HPS-750-E-AC-1S-KT, 1150HP,7,500psi
Draw works	SSGD-750-4600-50-82 with 4x1,150HPAC
Derrick	National Oilwell D-170x40-2000-JU-BN
Cantilever	70ftx 15ft
Mud Pumps	NOV 14-P-220 x 3, 2 x 1,150HPeach, 7,500 psi
<b>Storage Capacities</b>	
Fuel Oil	4,150bbls
Liquid Mud	4,729bbls
Base Oil	1,339bbls
Brine	1,339bbls
Drill Water	9,874bbls
Portable Water	3,459bbls
<b>BOP &amp; Subsea Equipment</b>	
BOP Rams	Cameron x 13-5/8" x 15,000psiWP Single Ram BOP , Cameron x 13-5/8" x 15,000psiWP Dual Ram BOPs



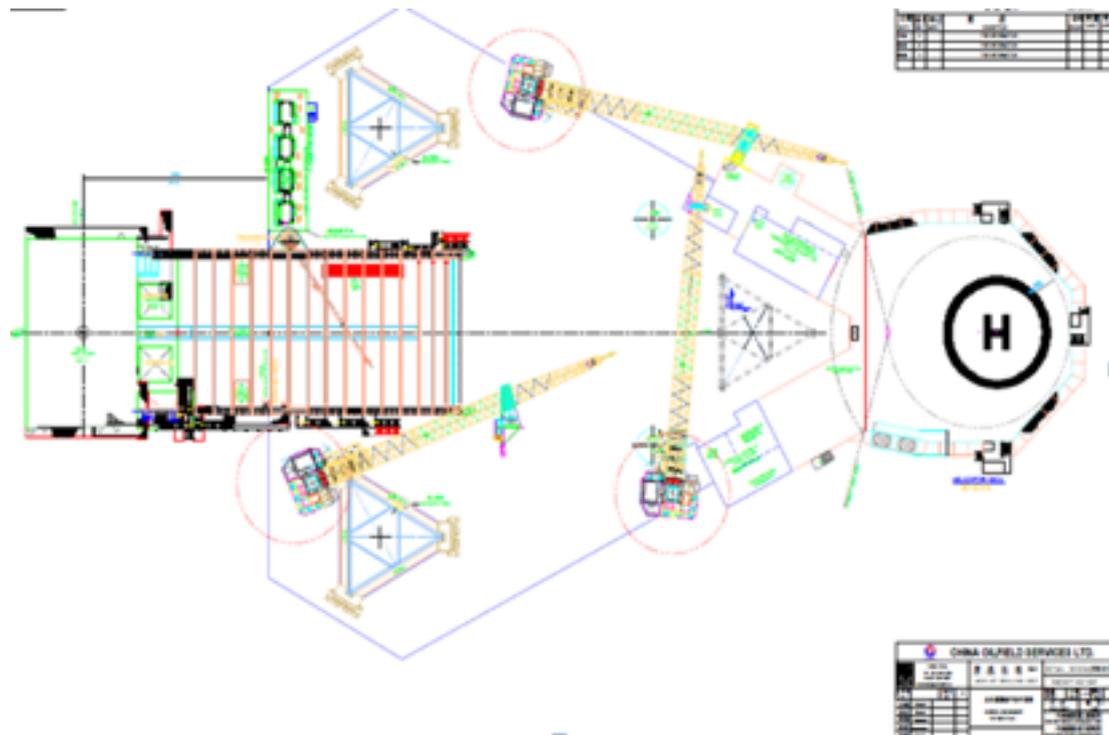

These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.