
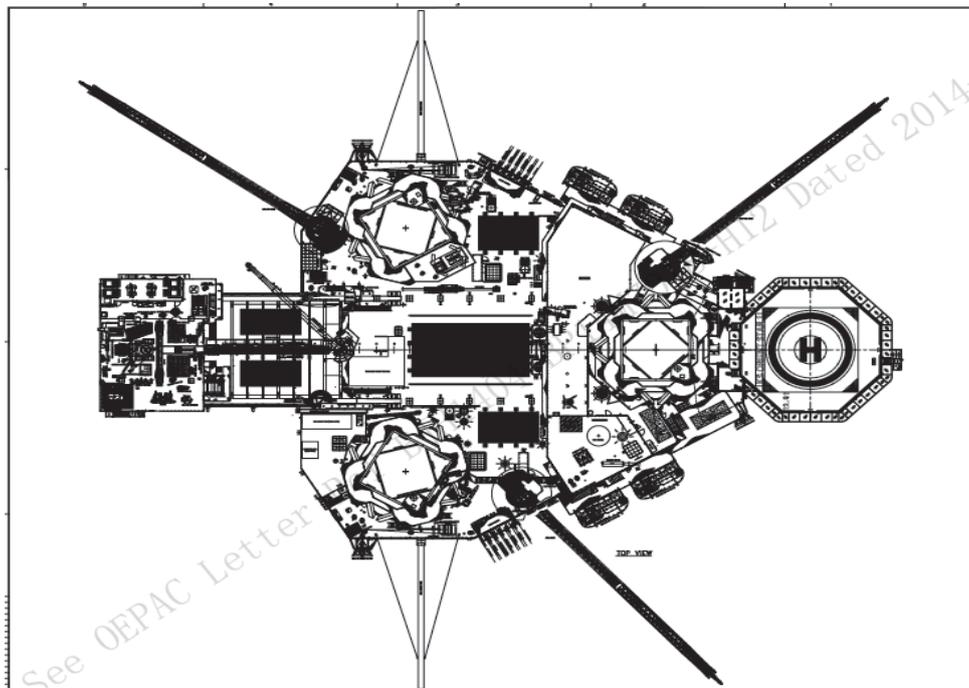


KAIXUANYIHAO

	<p>For Additional Information Please Contact: COSL DRILLING Marketing Department P. O. Box 232, Beijing 101149, China, P.R.C Phone: +86 010 84522511 Fax: +86 010 84522867 sh_cosldrillingmarket@cosl.com.cn www.cosl.com.cn</p>
General Description	
Design/Generation	Letourneau " Workhorse" Quadrangular shape
Constructing Shipyard	COSCO Nantong Shipyard
Year Enter Service/Significant Upgrades	2011
Classification	ABS
Flag	China
Displacement	16,486tons
Variable Deck	4,026tons
Operating Water Depth	400ft
Maximum Drilling Depth	35,000ft
Accommodation	150
Drilling Equipment	
Top Drive	NOV TDS-1000A ,1150 HP, 7,500 psi
Draw works	NOV ADS-10Q with 4 x 1150 HPAC
Derrick	NOV–Aft offset beam leg derrick / Dreco model D-175X36X36X14X2000-HL
Cantilever	80ftx 30ft
Mud Pumps	NOV14-P-220 x 3, 1134 HP each, 7500 psi
Storage Capacities	
Fuel Oil	5,145bbls
Liquid Mud	5,217bbls
Base Oil	404bbls
Brine	404bbls
Drill Water	10,644bbls
Portable Water	5,565bbls
BOP & Subsea Equipment	
BOP Rams	Shaffer x 18 3/4"x15,000psiWPDual Ram BOP's
BOP Annular	Shafferx18 3/4"x10,000psiWP Annular BOP
Diverter	KFDJ-500Diverter
Other Information	
Cranes	75ton x 3
Heli-deck	Sikorski S61 N Helicopter
Containment System	zero discharge

KAIXUANYIHAO

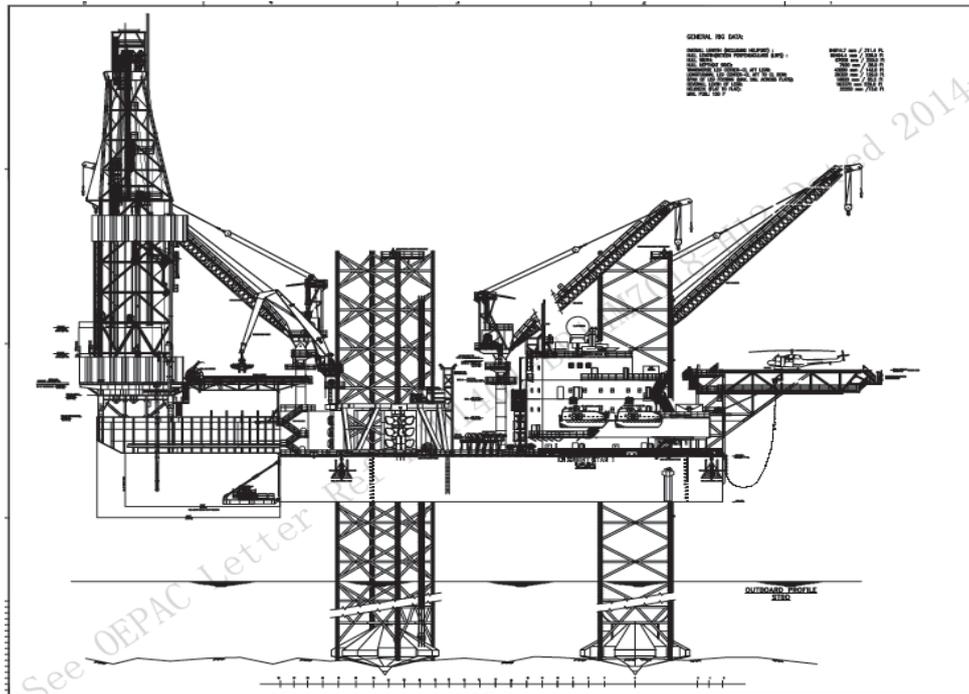

These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.