


NANHAI 5 (“NH5”)

	For Additional Information Please Contact: COSL DRILLING Marketing Department P. O. Box 232, Beijing 101149, China, P.R.C Phone: +86 010 84522511 Fax: +86 010 84522867 sh_cosldrillingmarket@cosl.com.cn www.cosl.com.cn
General Description	
Design/Generation	Friede and Goldman pacesetter
Constructing Shipyard	Framnaes mekaniske verksted Norway
Year Enter Service/Significant Upgrades	1983
Classification	DNV ABS
Flag	China
Displacement	24,957 tons
Variable Deck	3,876 tons
Operating Water Depth	1,508 ft
Maximum Drilling Depth	24,994 ft
Accommodation	106
Drilling Equipment	
Top Drive	Varco TDS-4s, 1100HP
Draw works	NATIONAL OILWELL 1625 - DE 2700 hp continuous input power, 1-1/2in drilling line
Derrick	A/S NORMAR / DYNAMIC DERRICK
Mud Pumps	3 x NATIONAL OILWELL 12 - P - 160, 1600HP each, working pressure: 5,000 psi
Storage Capacities	
Fuel Oil	14,467bbls
Liquid Mud	2334bbls
Base Oil	1,824bbls
Brine	1,824bbls
Drill Water	11,951bbls
Portable Water	3,534bbls
BOP & Subsea Equipment	
BOP Rams	2 x Cameron Type U II 18 3/4in 15000psi double rams;

BOP Annular	Cameron type DL 18 3/4in 10000 psi annular
Moon Pool	77.3ftx19.2ft
Tensioner	NL SHAFFER /twin riser tensioner
Other Information	
Cranes	70t x1, 30t x2
Heli-deck	Sikorsky S61N11 Helicopter
Station Keeping	Mooring system

NANHAI 5 (“NH5”)

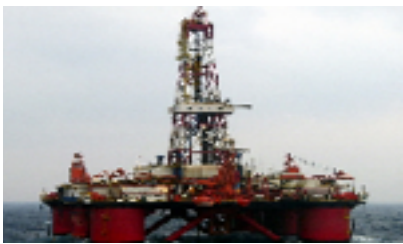