
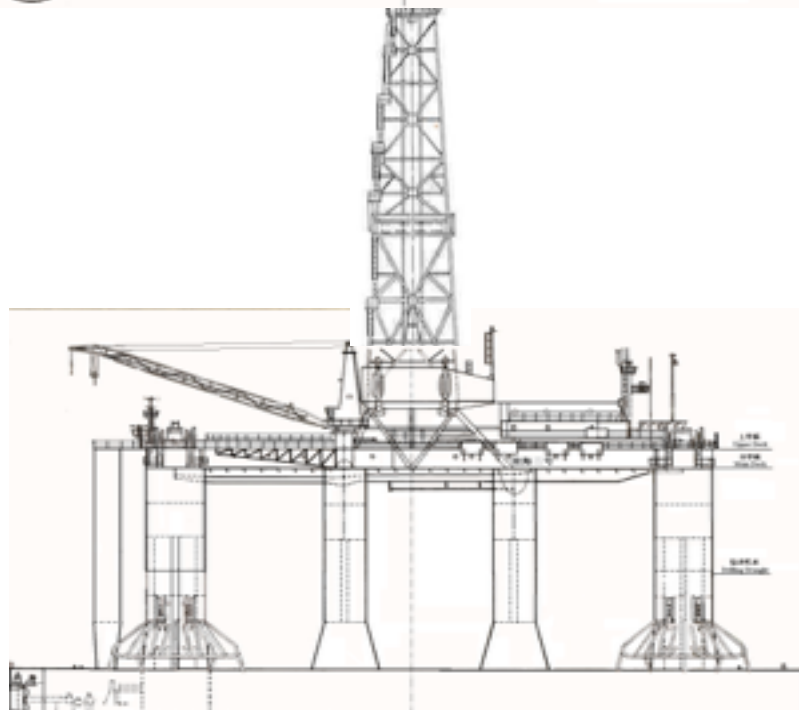
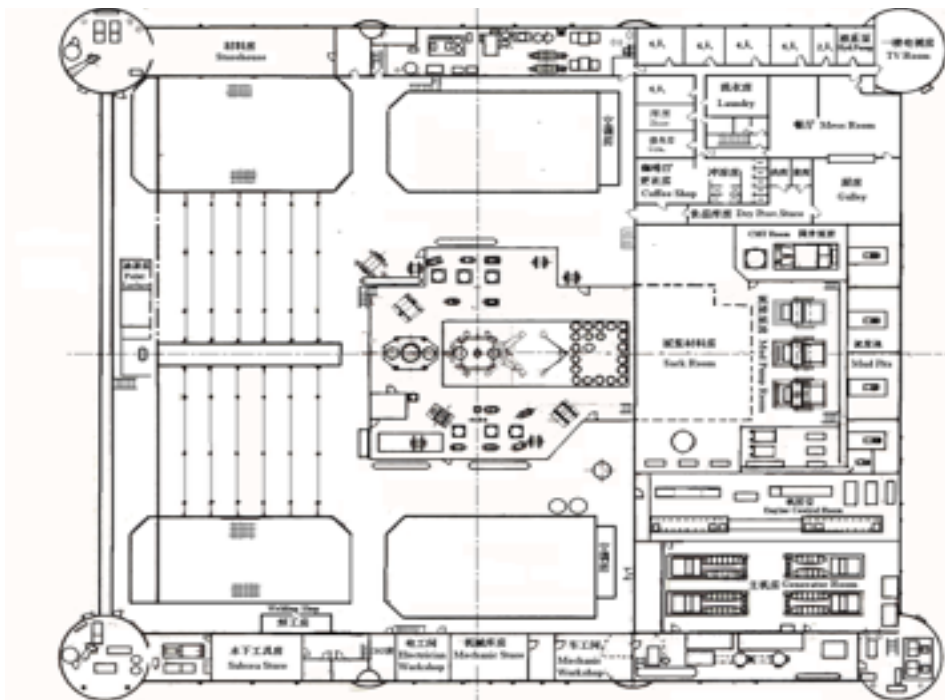


**NANHAI 2 (“NH2”)**

	<p>For Additional Information Please Contact:  <b>COSL DRILLING</b>  Marketing Department  P. O. Box 232, Beijing 101149, China, P.R.C  Phone: +86 010 84522511  Fax: +86 010 84522867  <a href="mailto:sh_cosldrillingmarket@cosl.com.cn">sh_cosldrillingmarket@cosl.com.cn</a>  <a href="http://www.cosl.com.cn">www.cosl.com.cn</a></p>
<b>General Description</b>	
Design/Generation	Semi-submersible
Constructing Shipyard	AKER
Year Enter Service/Significant Upgrades	1974
Classification	ABS
Flag	China
Displacement	19,008 tons
Variable Deck	2,610tons
Operating Water Depth	1,000ft
Maximum Drilling Depth	20,000ft
Accommodation	108
<b>Drilling Equipment</b>	
Top Drive	NOV TDS-8SA,1150HP, 7500psi
Draw works	CONTINENTAL Emsco C3 Type II, 2,400 hp, 1-1/2in drilling line
Derrick	EMSCO/22BDA
Mud Pumps	3x Baoji-F1600, 2x800HP each, working pressure: 5,000 psi
<b>Storage Capacities</b>	
Fuel Oil	17,185bbls
Liquid Mud	1,590bbls
Base Oil	---
Brine	---
Drill Water	12,495bbls
Portable Water	3,738bbls
<b>BOP &amp; Subsea Equipment</b>	
BOP Rams	2 x Cameron 18 3/4in 10,000psi double rams;

BOP Annular	2 x NL SHAFFER 18 3/4in 5,000 psi annular
Moon Pool	18.3ft x 67.8ft
Tensioner	NL SHAFFER 80 K / riser tensioner
<b>Other Information</b>	
Cranes	40t x2
Heli-deck	Sikorsky S61N11 Helicopter
Station Keeping	Mooring system

**NANHAI 2 (“NH2”)**



These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.