
HAIYANGSHIYOU 923 ("HYSY923")

For Additional Information Please Contact: COSL DRILLING Marketing Department P. O. Box 232, Beijing 101149, China, P.R.C Phone: +86 010 84522511 Fax: +86 010 84522867 sh_cosldrillingmarket@cosl.com.cn www.cosl.com.cn		
General Description		
Design/Generation	Friede & Goldman,Ltd.TM / L-780 MOD II	
Constructing Shipyard	Qingdao Shipbuilding Industry Co, Ltd. P.R.C	
Year Enter Service/Significant Upgrades	2010	
Classification	CSA	
Flag	China	
Displacement	5,413tons	
Variable Deck	2,269tons	
Operating Water Depth	200ft	
Maximum Drilling Depth	18,000ft	
Accommodation	100	
Drilling Equipment		
Top Drive	AKER MH AS, 1150HP, 5,000psi	
Draw works	Baoji petroleum machine CO.,LTD / JC-70D with 1x2,000HPAC	
Derrick	Baoji petroleum machine / HJJ450/47-T7	
Cantilever	40ftx 12ft	
Mud Pumps	BAOJI F-1600 x 3, 1,600HPeach, 5000 psi	
Storage Capacities		
Fuel Oil	2,522bbls	
Liquid Mud	1,874bbls	
Base Oil		
Brine		
Drill Water	5,616bbls	
Portable Water	1,861bbls	
BOP & Subsea Equipment		



BOP Rams	Huabei Petroleum machine CO.LTDx13-5/8 "x 10,000psiWP Single Ram &Dual Ram BOPs
BOP Annular	Huabei Petroleum machine CO.LTD x 13-5/8" x 5,000psiWP Annular
Diverter	Huabei petroleum machine CO.LTD /FH35
Other Information	
Cranes	35ton x 2
Heli-deck	Sikorski S61 N Helicopter
Containment System	zero discharge

HAIYANGSHIYOU 923 ("HYSY923")

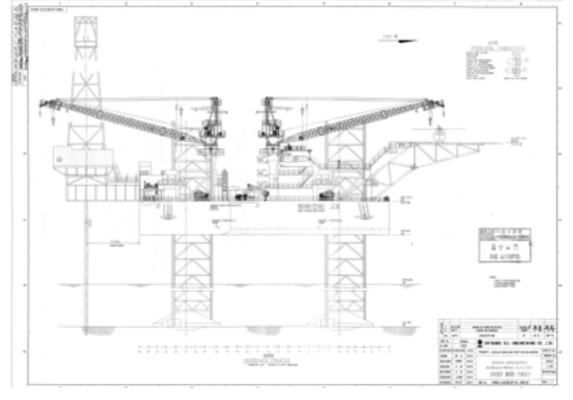

These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.



